



# UX10 FULLY RUGGED TABLET

- 8th Generation Intel<sup>®</sup> Core<sup>™</sup> i7 / i5 Processor
- 10.1" FHD LumiBond® 2.0 Display with Getac Sunlight Readable Technology (1,000 nits) and Capacitive Touchscreen
- Enhanced Enterprise Security with Optional Intel vPro™, Windows Hello
   Face-authentication Camera and Multi-factor Authentication Options
- Detachable Keyboard and Multifunctional Hard Handle for On-the-job Flexibility
- Multiple Configurable Options to Fit Diverse Usage Scenarios












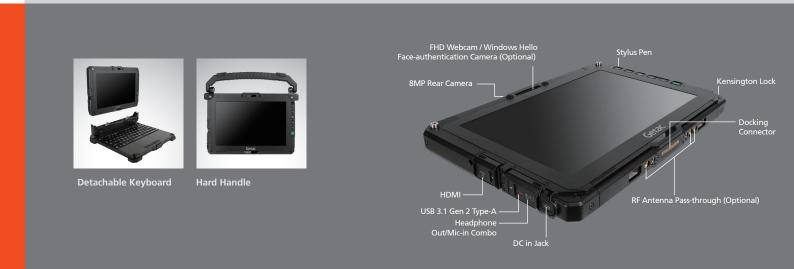

# **Specifications**

# **Operating System**

Windows 10 Pro

## **Mobile Computing Platform**

Platform Options:

Intel® Core™ i7-Technology Intel® Core™ i7-8565U Processor 1.8 GHz Max. 4.6GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Intel® Core™ i7 vPro™ Technology Intel® Core™ i7-8665U vPro™ Processor 1.9GHz Max. 4.8 GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Intel® Core™ i5 Technology Intel® Core™ i5-8265U Processor 1.6GHz Max. 3.9GHz with Intel® Turbo Boost Technology 6MB Intel® Smart Cache

Intel® Core™ i5 vPro™ Technology Intel® Core™ i5-8365U vPro™ Processor 1.6GHz Max. 4.1 GHz with Intel® Turbo Boost Technology 6MB Intel® Smart Cache

# **VGA** Controller

Intel® UHD Graphics 620

**Display** 10.1" IPS TFT LCD FHD (1920 x 1200) 1000 nits LumiBond® display with Getac sunlight readable technology
Capacitive multi-touch screen

# Storage & Memory

Optional 8GB / 16GB DDR4 Optional SSD 256GB / 512GB / 1TB

6 tablet buttons (Windows, Power, Function Key, Camera Capture/ Barcode Reader Trigger, Volume Up, Volume Down)

# **Pointing Device**

Touchscreen

- Capacitive multi-touch screen
  Optional dual mode touchscreen (multi-touch and digitizer)

Expansion Slot
Optional 1D/2D imager barcode reader, or HF
RFID reader, or serial port, or LAN port (RJ45), or
USB 3.0 port, or USB 3.1 Gen 1 Type-C port, or
MisroED Relation V Communications and the serial seria MicroSD slot or VGA portii

Optional magnetic stripe reader or fingerprint scanner, or HF RFID readeri, or serial port+LAN port (RJ45) $^{\rm w}$ 

Optional smart card reader, or bridge battery, or bridge battery+smart card reader $^{\nu}$ 

# I/O Interface

FHD webcam x 1 or Optional Windows Hello face-authentication camera (front-facing) x 1 8M pixels auto focus rear camera x 1 Headphone out / mic-in combo x 1 DC in Jack x 1 USB 3.1 Gen 2 Type-A x 1 HDMI x 1 Docking connector x 1 Optional RF antenna pass-through for GPS, WLAN and WWAN

Communication Interface Optional 10/100/1000 base-T Ethernet Intel® Dual Band Wireless-AC 9260, 802.11ac Bluetooth (v5.0)vi
Optional 4G LTE mobile broadband with integrated GPS

# **Security Feature**

Optional Intel® vPro™ Technology TPM 2.0 Optional HF RFID reader<sup>i,ii</sup>

Optional magnetic stripe readerii, or fingerprint scanneri Optional smart card reader Kensington lock

# **Power**

AC adapter (65W, 100-240VAC, 50 / 60Hz) Li-lon smart battery (11.1V, typical 4200mAh; min.4080mAh) x 1 Optional high capacity battery (10.8V, 9240mAh) x 1 Optional bridge battery

# Dimension (W x D x H) & Weight

276.8 x 194.5 x 23.5 mm (10.89" x 7.65" x 0.92"), 1.22 kg (2.68 lbs)vii

# **Rugged Feature**

MIL-STD-810G certified and IP65 certified MIL-STD-461G certified<sup>viii</sup> Optional ANS/UL 121201, CSA C22.2 NO. 213 Optional Salt fog certified<sup>ix</sup>
6 feet drop resistant<sup>x,xi</sup>
e-Mark certified for vehicle usage

# **Environmental Specification**

Temperature<sup>xi</sup>

Operating: -29°C to 63°C / -20°F to 145°F Storage: -51°C to 71°C / -60°F to 160°F

Humidity: - 95% RH , non-condensing

## **Software**

Getac Utility Getac Camera Getac Geolocation Getac Barcode Manager Optional Absolute DDS® Persistence

Carry bag
Multi-bay charger (Dual Bay)
Multi-Bay charger (Eight-Bay)
Vehicle adapter (120W, 11-32VDC)
AC adapter (65W, 100-240VAC)
Offie dock AC adapter (90W, 100-240VAC)
MIL-STD-461 certified AC adapter (90W, 100-240VAC) Digitizer pen Capacitive stylus (Hard-tip) Protection film Tablet folio case Hand strap Shoulder harness (4-point; handsfree) Shoulder strap (2-point)
Standard battery (11.1V, typical 4200mAh; min. High capacity battery (10.8V, 9240 mAh) Detachable keyboard

# **Bumper-to-Bumper warranty**

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment

That is why Getac has introduced accidental damage as standard under our new Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

# Standard

3 years Bumper-to-Bumper

- 13.56MHz Contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™
- compliant).

  1D/2D imager barcode reader, HF RFID reader, serial port, LAN port (RI45), USB 3.0 port, USB 3.1 Gen 1 Type-C port, MicroSD slot and VGA port are mutually exclusive options. Not Energy Star 7.0 compliant.

  Magnetic stripe reader, fingerprint scanner, HF RFID reader and serial port+LAN port (RJ45) are mutually exclusive options.

  Smart card reader, bridge battery and bridge battery+smart card reader are mutually exclusive options.

- exclusive options.

  Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- vii Weight and dimensions vary from configurations and optional accessories. viii MIL-STD-461G 90W AC adapter sold
- separately.

  Not compatible with magnetic stripe reader.
- Drop test results vary from configurations and optional accessories.
- Tested by a national independent third party test lab following MIL-STD-810G.

# **Fully Rugged Tablet**



# **Docking Solutions**

|                      | Vehicle Dock             | Office Dock              |
|----------------------|--------------------------|--------------------------|
| Serial Port          | 1                        | 1                        |
| VGA                  | -                        | 1                        |
| Microphone           | -                        | 1                        |
| Audio Output         |                          | 1                        |
| DC in Jack           | 1                        | 1                        |
| USB                  | USB 3.0 x2<br>USB 2.0 x2 | USB 3.0 x2<br>USB 2.0 x2 |
| LAN                  | 1                        | 1                        |
| HDMI                 |                          | 1                        |
| RF Antenna Connector | 3 (WWAN,<br>WLAN, GPS)   |                          |
| Kensington Lock      | 1                        | 1                        |



GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd.,

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist., Taipei City, 11568, Taiwan, R.O.C. Tel: +886 2 2785 7888 globalmarketing@getac.com | www.getac.com



Copyright © 2020 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved ation provided herewith is for reference only available specification shall be subjected to quotation by request. V01M04Y20WW